



Assembly Instructions


BOLTLESS SHELVING



87

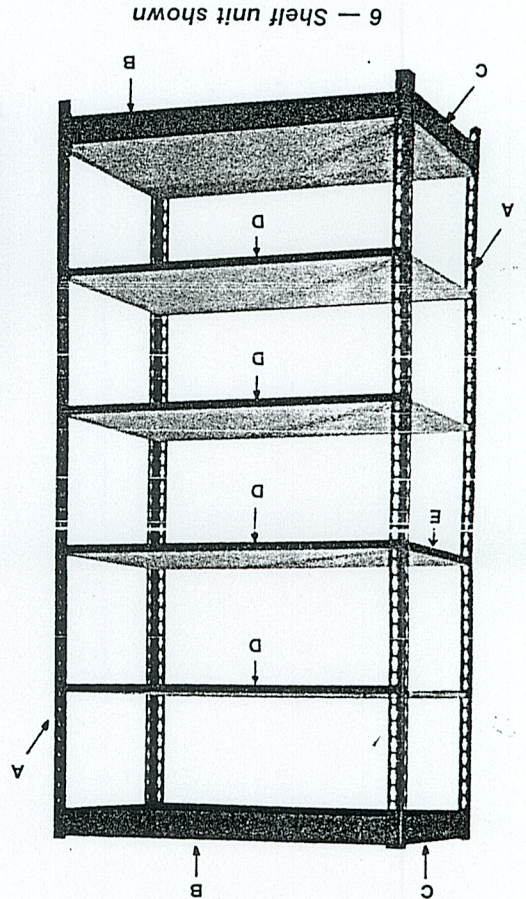

Fast Easy Assembly
NO NUTS
OR BOLTS

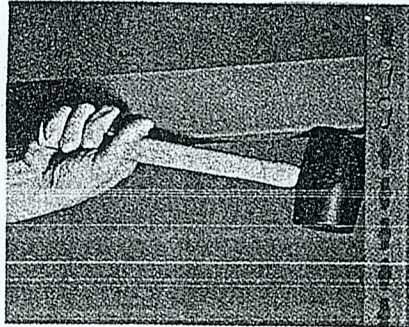

Rapid assembly without any special tools — All you need is a rubber mallet or hammer.

MODEL NUMBERS

5 SHELF UNITS

RS1500 3W574 RS1503 3W577
RS1501 3W575 RS1504 3W578
RS1502 3W576 RS1505 3W579

6 SHELF UNITS

RS1506
RS1507
RS1508
RS1511

8 SHELF UNITS

RS1512
RS1513
RS1514
RS1517

EXTRA LEVEL KIT

36" RS1518 3W580
48" RS1519 3W581

PARTS LIST

	A 84" Posts	B Left/Right Double Rivet Angle Beams	C Front/Back Double Rivet Angle Beams	D Left/Right Single Rivet Angle Beams	E Front/Back Single Rivet Angle Beams
5 Shelf Unit	4	4	4	6	2
6 Shelf Unit	4	4	4	8	2
8 Shelf Unit	4	4	4	12	2

CAUTION: DO NOT use this unit as a ladder. If the unit is to be either loaded in a top heavy manner or positioned on an uneven floor, it should be secured to a suitable supporting structure.

ASSEMBLY INSTRUCTIONS


- Step 1** Assemble 2 posts with front to back double rivet angle beams by inserting rivets on beams into slots of posts at the top and bottom. The front to back beam set at the top should be one hole from top to allow the excess post to keep the particle board decking in place. In the middle of the post assembly, add 1 single rivet angle beam. Tap all beams lightly with a mallet to hold this final position. Repeat this process for the other post assembly. Units should be properly secured to wall or floor with appropriate fasteners.
- Step 2** Connect the two front to back post assemblies at the same level at the top and the bottom with 2 left to right double rivet angle beams and then repeat this procedure to complete the frame. Again tap all beams lightly with a mallet to secure their final position.
- Step 3** To complete the set up, assemble 2 left to right single rivet angle beams at each desired shelf location, and tap lightly into place.
- Step 4** Put particle board decking or shelves in place.

4400 south packers avenue • Chicago, Illinois 60609
MANUFACTURERS OF QUALITY STEEL EQUIPMENT FOR INDUSTRY, OFFICE & INSTITUTIONS

Edsall

Congratulations ! On the purchase of your Cabinet Dolly. (Some assembly required.)

Model Number
CBD1836

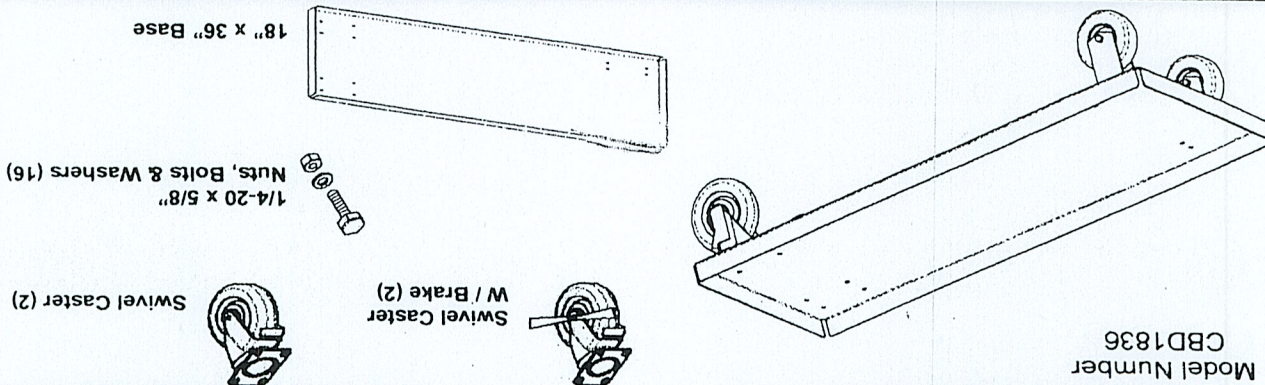

IMPORTANT SAFETY INSTRUCTIONS PLEASE READ FIRST

When moving the cabinets on the dolly, always push from the sides of the cabinet. **NEVER** push from the front, back, or top. This can cause a "tipping" hazard, which can result in a serious injury to yourself or others. **NEVER** pull the cabinet during movement, push the cabinet to the location necessary.



Always move the cabinet over a flat level surface. Rough surfaces cause the cabinet to vibrate, which causes the cabinet's load to increase in weight, or again may cause a "tipping" hazard which can result in a serious injury to yourself or others. Always make sure when moving the cabinet the doors are closed and locked. Doors may open and spill the contents inside. Also after movement, carefully open the doors. It is possible that the cabinets contents may have shifted, and may fall from the cabinet.

Do not use this dolly for anything other than the manufacturer's intended purpose. **NEVER** stand on or ride on the cabinet. Use the caster brakes to hold the dolly in position when it is stationary. **DO NOT OVERLOAD.** Make sure items are evenly distributed on each shelf, and that the heavier items are placed at the bottom. Do not store any items on the top of the cabinet during movement, this may cause a "falling" hazard that can injure yourself or others.

Assembly Instructions

This instruction sheet was designed to help you assemble the dolly in the proper way, please follow them using all parts and fasteners provided. Any alteration or deviation from these instructions can result in dolly and cabinet failure. After assembly is complete, make sure the dolly is placed on a level surface as this may effect the performance of the unit.

Place the dolly base on it's side and align the brake and swivel casters with the proper holes on the dolly base (see figure 1). Install the 1/4-20 x 5/8" bolts through the dolly base and into the holes of the casters. Apply the washers and nuts and tighten appropriately (see figure 2). Turn the dolly right side up, lock the caster brakes and place the cabinet into the dolly.

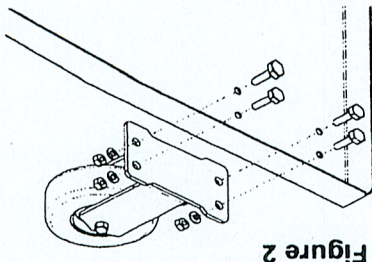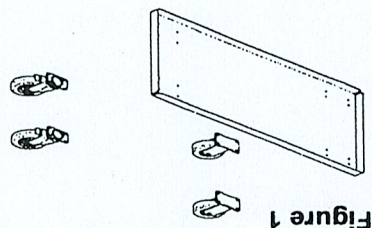

Should you have any comments, damage, missing parts, or problems with assembly of this unit please feel free to contact our Pro-Maxx manufacturing facility at, (773) 475-3000 and request customer service. We can also be reached on the internet at the following email address, customerservice@promaxxsystem.com

To obtain replacement parts, please provide the following information :

- Model # - Part # & Description - Location Purchased - Date Purchased